




# Throughbolt anchor - stainless steel - ETA Option 1

Reference: A4-BZ2

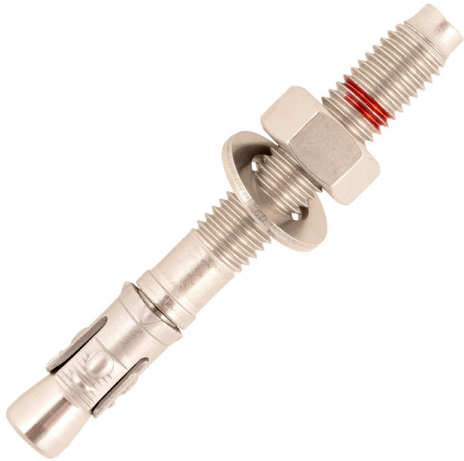

## **Efficient**

High-resistance steel for high performance.

## **Polyvalent**

Can be used outside, as well as inside.

## **Dessin technique**

### **Description longue (Informations techniques)**

Family: Heavy duty anchors

Use: Fixation dans le béton

Use: Indoor/Outdoor

Assessment: ETA

Assessment: Fire120

Assessment: ETA opt. 7

Base material: Concrete

Material: Stainless steel

Type: Throughbolt

Loads: Medium

Loads: Heavy

Screw head: Threaded

Socket:

## Tableau des caracteristiques

Diamètre	Longueur	ØDrill	h1	tfix	SW	Lf	tinst	Référence
M8	65	8	60	5	13	35	20	A4-BZ2-08X06 5
M8	75	8	60	15	13	45	20	A4-BZ2-08X07 5
M8	100	8	60	40	13	65	20	A4-BZ2-08X10 0
M8	120	8	60	60	13	90	20	A4-BZ2-08X12 0
M10	90	10	75	10	17	65	45	A4-BZ2-10X09 0
M10	100	10	75	20	17	65	45	A4-BZ2-10X10 0
M10	120	10	75	40	17	85	45	A4-BZ2-10X12 0
M10	140	10	75	60	17	100	45	A4-BZ2-10X14 0
M12	100	85	12	19	5	56	60	A4-BZ2-12X10 0
M12	120	12	85	25	19	76	60	A4-BZ2-12X12 0
M12	140	12	85	45	19	96	60	A4-BZ2-12X14 0
M16	125	16	100	15	24	68	130	A4-BZ2-16X12 5
M16	145	16	100	35	24	94	130	A4-BZ2-16X14 5